


LED Industrial Light Technical Parameters

JS(I)-(MAR150W)

Item	Parameters	
Input Voltage	AC100~277V	
Frequency Range	50Hz~60Hz	
Total Harmonic Distortion	≤9 %	
Power Factor	>0.95	
Power Efficiency	>90 %	
LED Quantity	3 PCS COB	
LED Consumption	3*45W	
Rated Power	150W	
LED Initial Flux	W	16250 Lm
	N	17100 Lm
	C	17250 Lm
lamp's Efficiency	>80 %	
Color Temperature	W	3000±100K
	N	4000±200K
	C	6000±300K
Color Rendering Index	W	Ra>80
	N,C	Ra>83
Beam Angle	30°	
Lighting Distribution	LED+Reflector	
LED Junction Temperature	≤80°C	
Working Temperature	-20°C~+50°C	
Storage Temperature	-25°C~+65°C	
IP Grade	IP 65	
Working Life-span	50000H	
Power line	0.75mm ² ×3	
Connect wire	Brown	L
	Blue	N
	Yellow/Green	G
Certificate	UL & DLC	



Dimensions @30 degree

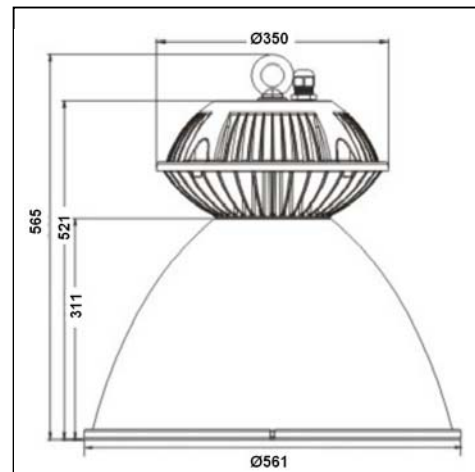

IES@30 degree

